


Rotac® Hyd-ro-ac® Products – Rotary Actuator: 26R-2 THRU 26R-124

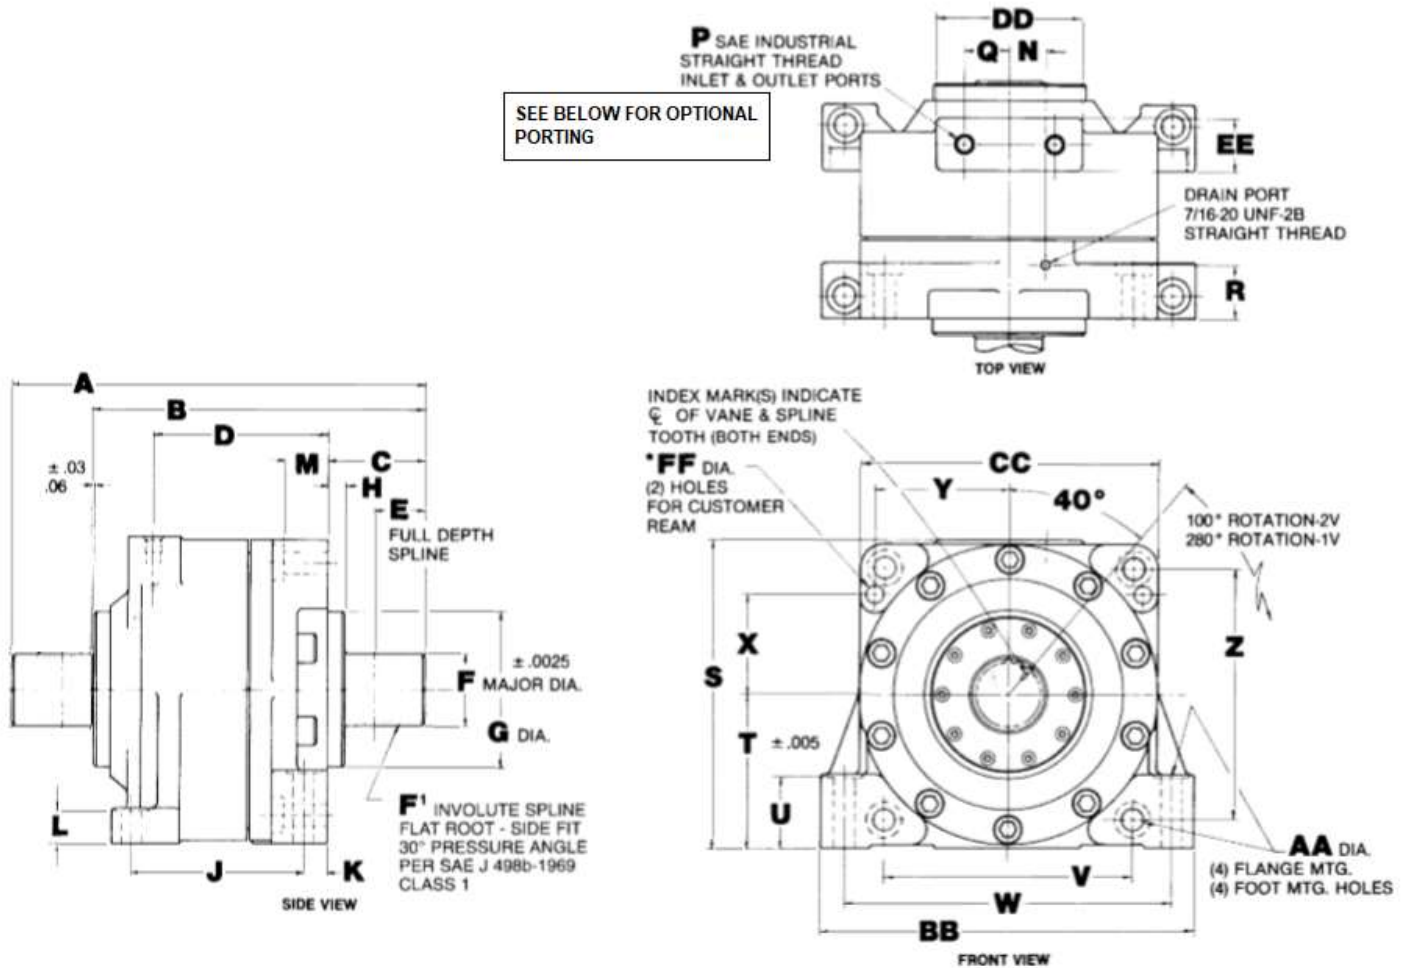

NOTE: Connection of drains will add significant life to shaft seals. *Their use is highly recommended.*

\*NOTE: FOR FLANGE MTD. UNITS THESE HOLES SHOULD BE TRANSFER DRILLED AND REAMED AT INSTALLATION FOR INSERTION OF DOWEL PINS. (THIS WILL AID IN PREVENTING "RACKING" OF ACTUATOR ON MOUNTING BOLTS DUE TO TORSIONAL FORCES)

IMPORTANT NOTES TO AVOID ACTUATOR DAMAGE AND VOIDED WARRANTY:

1. Connections of drains will add significant life to the shaft seals. This is highly recommended.
2. 2,000 psi maximum is recommended for severe duty applications, such as operating at maximum torque at high cycle rates for extended periods. Please consult factory for test applications beyond 2,000 psi. 3,000 psi can be used on intermittent shockless actuations.
3. Design considerations should be made to limit the axial and radial loading applied to the actuator. Contact factory if axial and/or radial loading must be applied to the actuator. Unapproved axial and/or radial loading will void the actuator's warranty.
4. External stops must be used to limit shaft rotation for most applications. Using the actuators internal components as rotational stops will cause damage and void the actuators warranty.
5. It is critical that the hydraulic system have pressure relief located in close proximity to the actuator to prevent pressure spikes from damaging the actuator. Micromatic offers Cross Port Relief (CPR) manifolds that can be used with the actuator if the customer's hydraulic system does not have pressure relief (contact factory for details). Hydraulic pressure spikes will rapidly cause damage and void the actuator's warranty.
6. It is recommended the hydraulic fluid be filtered to 5 microns or less (maximum of 10 microns).

**DIMENSION IN INCHES (MILLIMETERS)**

	<b>26R-2</b>	<b>26R-5</b>	<b>26R-10</b>	<b>26R-17</b>	<b>26R-31</b>	<b>26R-62</b>	<b>26R-124</b>
<b>A</b>	10.08 (256)	12.06 (306.3)	14.19 (360.4)	16.57 (420.9)	18.58 (471.9)	24.38 (619.3)	31.22 (792.9)
<b>B</b>	8.02 (203.7)	9.84 (249.9)	11.50 (292.1)	13.51 (343.2)	15.01 (383.3)	19.44 (493.8)	25.06 (636.5)
<b>C</b>	2.62 (66.5)	2.86 (72.6)	3.41 (86.6)	3.87 (98.3)	4.38 (111.3)	6.02 (152.9)	7.51 (190.8)
<b>D</b>	3.50 (88.9)	4.86 (123.4)	5.63 (143)	6.61 (167.9)	7.80 (198.1)	9.87 (250.7)	12.80 (325.1)
<b>E</b>	1.62 (41.1)	1.75 (44.4)	2.12 (53.8)	2.50 (63.5)	3.00 (76.2)	4.25 (107.9)	5.25 (133.4)
<b>F<sub>6</sub></b>	Ø1.3335 (Ø 33.871)	Ø 1.6685 (Ø 42.380)	Ø 2.2268 (Ø 56.561)	Ø 2.6735 (Ø 67.907)	Ø 3.2735 (Ø 83.147)	Ø 4.0935 (Ø 103.975)	Ø 4.8435 (Ø 123.025)
<b>F<sub>1</sub></b>	26T 20/40P 1.3000PD	26T 16/32P 1.6250PD	26T 12/24P 2.1667PD	26T 10/20P 2.6000PD	32T 10/20P 3.2000PD	32T 8/16P 4.0000PD	38T 8/16P 4.7500PD
<b>G</b>	3.38 (85.9)	4.25 (108)	5.00 (127)	6.00 (152.4)	7.00 (177.8)	9.13 (231.9)	10.50 (266.7)
<b>H</b>	0.50 (12.7)	0.57 (14.5)	0.64 (16.3)	0.76 (19.3)	0.76 (19.3)	1.02 (25.9)	1.27 (32.3)
<b>J</b>	3.56 (90.4)	4.62 (117.3)	5.37 (136.4)	6.69 (169.9)	7.75 (196.9)	9.31 (236.5)	12.19 (309.6)
<b>K</b>	0.63 (16)	0.86 (21.8)	1.01 (25.7)	1.07 (27.2)	1.04 (26.4)	1.51 (38.4)	2.01 (51.1)
<b>L</b>	0.56 (14.2)	0.81 (20.6)	0.94 (23.9)	1.12 (28.4)	1.50 (38.10)	1.69 (42.9)	2.06 (52.3)
<b>M</b>	0.75 (19.1)	1.25 (31.8)	1.50 (38.1)	1.75 (44.5)	2.00 (50.8)	2.68 (68.1)	4.00 (101.6)
<b>N</b>	0.77 (19.6)	1.01 (25.7)	1.19 (30.2)	1.47 (37.3)	1.68 (42.7)	2.17 (55.1)	2.44 (62)
<b>P<sub>3</sub></b>	<sup>3</sup> / <sub>4</sub> - 16	<sup>3</sup> / <sub>4</sub> - 16	<sup>7</sup> / <sub>8</sub> - 14	1 <sup>1</sup> / <sub>16</sub> - 12	1 <sup>5</sup> / <sub>16</sub> - 12	1 <sup>5</sup> / <sub>16</sub> - 12	1 <sup>7</sup> / <sub>8</sub> - 12
<b>Q</b>	0.88 (22.4)	1.06 (26.9)	1.25 (31.8)	1.62 (41.1)	2.06 (52.3)	2.62 (66.5)	2.75 (69.9)
<b>R</b>	1.29 (32.8)	1.80 (45.7)	1.82 (46.2)	2.17 (55.1)	2.42 (61.5)	2.79 (70.9)	3.67 (93.2)
<b>S</b>	6.00 (152.4)	8.00 (203.2)	9.76 (247.9)	11.26 (286)	13.76 (349.5)	17.13 (435.1)	20.50 (520.7)
<b>T<sub>4</sub></b>	3.000 (76.20)	4.000 (101.60)	4.875 (123.83)	5.625 (142.88)	6.875 (174.63)	8.562 (214.47)	10.25 (260.35)
<b>U</b>	1.50 (38.1)	1.94 (49.3)	2.25 (57.2)	2.62 (66.5)	3.19 (81.0)	3.90 (99.1)	4.88 (123.9)
<b>V</b>	4.88 (123.9)	6.38 (162.1)	8.00 (203.2)	9.25 (234.9)	11.25 (285.8)	14.00 (355.6)	16.75 (425.5)
<b>W</b>	6.25 (158.8)	8.25 (209.6)	10.25 (260.4)	11.87 (301.5)	14.87 (377.7)	18.37 (466.6)	21.25 (539.8)
<b>X</b>	1.78 (45.2)	2.44 (61.9)	2.94 (74.7)	3.50 (88.9)	4.44 (112.8)	5.44 (138.2)	6.31 (160.3)

<b>Y</b>	2.61 (66.3)	3.41 (86.6)	4.28 (108.7)	4.94 (125.5)	6.06 (153.9)	7.44 (188.9)	8.81 (223.8)
<b>Z</b>	4.88 (123.9)	6.38 (162.1)	8.00 (203.2)	9.25 (234.9)	11.25 (285.8)	14.00 (355.6)	16.75 (425.5)
<b>AA</b>	0.41 (10.4)	0.53 (13.5)	0.69 (17.5)	0.81 (20.6)	0.94 (23.9)	1.06 (26.9)	1.31 (33.3)
<b>BB</b>	7.12 (180.8)	9.62 (244.3)	11.75 (298.5)	13.62 (345.9)	17.00 (431.8)	21.00 (533.4)	24.50 (622.3)
<b>CC</b>	5.75 (146.1)	7.62 (193.5)	9.50 (241.3)	11.00 (279.4)	13.50 (342.9)	16.75 (425.5)	19.75 (501.7)
<b>DD</b>	3.38 (85.85)	3.94 (100.1)	4.50 (114.3)	5.75 (146.1)	6.62 (168.1)	8.00 (203.2)	9.62 (244.3)
<b>EE</b>	1.62 (41.1)	1.81 (45.9)	2.00 (50.8)	2.50 (63.5)	2.50 (63.5)	2.75 (69.9)	4.12 (104.6)
<b>FF<sub>4</sub></b>	0.23 (5.8)	0.34 (8.6)	0.47 (11.9)	0.72 (18.3)	0.84 (21.3)	0.84 (21.3)	0.84 (21.3)

- 1 SEE NOTE ABOVE FOR SPLINE TYPE
- 3 SEE BELOW FOR OTHER PORT OPTIONS
- 4 TOLERANCE ± 0.005 (0.13)
- 6 TOLERANCE ± 0.0025 (0.064)

OPTIONAL NPT AND BSPP PORTING			OPTIONAL SHAFT HOLES	
MODEL	NATIONAL PIPE THREAD (NPT)	BRITISH STANDARD PIPE THREAD (BSPP)	POTENTIOMETER SHAFT HOLE (in)	SHAFT END TAPPED HOLE (in)
<b>26R-2</b>	3/8-18 NPT	3/8-19 BSPP	$\frac{0.2491}{0.2486} \times 0.50DP$	5/16-18 UNC X 1/2 DP
<b>26R-5</b>	3/8-18 NPT	3/8-19 BSPP	$\frac{0.2491}{0.2486} \times 0.50DP$	3/8-16 UNC X 9/16 DP
<b>26R-10</b>	1/2-14 NPT	1/2-14 BSPP	$\frac{0.2491}{0.2486} \times 0.50DP$	1/2-13 UNC X 3/4 DP
<b>26R-17</b>	3/4-14 NPT	3/4-14 BSPP	$\frac{0.2491}{0.2486} \times 0.50DP$	1/2-13 UNC X 3/4 DP
<b>26R-31</b>	1-11.5 NPT	3/4-14 BSPP	$\frac{0.2491}{0.2486} \times 0.50DP$	3/4-10 UNC X 1-1/8 DP
<b>26R-62</b>	1-11.5 NPT	1-11 BSPP	$\frac{0.2491}{0.2486} \times 0.50DP$	1-8 UNC X 1-1/2 DP
<b>26R-124</b>	1-1/4-11.5 NPT	1-1/4-11 BSPP	$\frac{0.2491}{0.2486} \times 0.50DP$	1-8 UNC X 1-1/2 DP

**OPTIONAL MANIFOLD PORTING**  
**CONSULT FACTORY FOR OPTIONS**

**OPTIONAL CROSS PORT RELIEF MANIFOLDS**  
**OPTIONAL SPLINED SHAFT COUPLINGS**

<b>SINGLE VANE 280° ROTATION (±1°)</b>						
<b>MODEL</b>	<b>TORQUE in-lbs (N-m)</b>			<b>VOLUMETRIC DISPLACEMENT in<sup>3</sup> (cm<sup>3</sup>)</b>		<b>APPROX. WEIGHT lb (kg)</b>
	<b>1000 psi (69.0 bar)</b>	<b>2000 psi (137.9 bar)</b>	<b>3000 psi (206.9 bar)</b>	<b>PER 280°</b>	<b>PER Radian</b>	
<b>26R-2</b>	1,720 (194.4)	3,440 (388.7)	5,160 (583.1)	9.35 (153.25)	19.1 (31.3)	32 (15)
<b>26R-5</b>	3,900 (440.7)	7,800 (881.4)	11,700 (1322.1)	21.20 (347.47)	4.34 (71.13)	67 (30)
<b>26R-10</b>	9,100 (1028.5)	18,200 (2056.6)	27,300 (3084.9)	49.50 (811.31)	10.12 (165.87)	115 (52)
<b>26R-17</b>	15,200 (1717.6)	30,400 (3435.2)	45,600 (5152.8)	82.60 (1353.81)	16.90 (276.99)	207 (94)
<b>26R-31</b>	27,500 (3107.5)	55,000 (6215)	82,500 (9322.5)	149.50 (2450.31)	30.60 (501.55)	334 (152)
<b>26R-62</b>	56,000 (6328)	112,000 (12656)	168,000 (18984)	304.00 (4982.56)	62.20 (1019.46)	680 (308)
<b>26R-124</b>	110,000 (12430)	220,000 (24860)	330,000 (37290)	598.00 (9801.22)	122.00 (1999.58)	1,221 (554)


\*2,000 psi maximum is recommended for severe duty applications, such as operating at maximum torque at high cycle rates for extended periods. Please consult factory for applications beyond 2,000 psi. 3,000 psi can be used on intermittent shockless actuations.

<b>DOUBLE VANE 100° ROTATION (±1°)</b>						
<b>MODEL</b>	<b>TORQUE in-lbs (N-m)</b>			<b>VOLUMETRIC DISPLACEMENT in<sup>3</sup> (cm<sup>3</sup>)</b>		<b>APPROX. WEIGHT lb (kg)</b>
	<b>1000 psi (69.0 bar)</b>	<b>2000 psi (137.9 bar)</b>	<b>3000 psi (206.9 bar)</b>	<b>PER 100°</b>	<b>PER Radian</b>	
<b>26R-2</b>	3,650 (412.5)	7,300 (824.9)	10,950 (1237.4)	6.67 (109.32)	3.82 (62.61)	33 (15)
<b>26R-5</b>	8,240 (931)	16,450 (1858.9)	24,700 (2791.1)	15.10 (247.49)	8.68 (142.27)	70 (32)
<b>26R-10</b>	19,300 (2180.9)	38,600 (4361.8)	57,900 (6542.7)	35.40 (580.21)	20.24 (331.73)	124 (56)
<b>26R-17</b>	32,200 (3638.6)	64,400 (7277.2)	96,600 (10915.8)	59.00 (967.01)	33.80 (553.98)	225 (102)
<b>26R-31</b>	58,300 (6587.9)	116,600 (13175.8)	174,900 (19763.7)	106.80 (1750.45)	61.20 (1003.07)	363 (165)
<b>26R-62</b>	118,500 (13390.5)	237,000 (26781)	355,500 (40171.5)	217.00 (3556.63)	124.40 (2038.92)	730 (331)
<b>26R-124</b>	232,000 (26216)	464,000 (52432)	696,000 (78648)	427.00 (6998.53)	244.00 (3999.16)	1,318 (598)

\*2,000 psi maximum is recommended for severe duty applications, such as operating at maximum torque at high cycle rates for extended periods. Please consult factory for applications beyond 2,000 psi. 3,000 psi can be used on intermittent shockless actuations.

<b>TEST PARAMETERS - OIL</b>					
	<b>MAX INTERNAL BYPASS LEAKAGE</b>				
<b>MODEL</b>					<b>MAX BREAK IN psi (bar)</b>
	<b>1V (in<sup>3</sup>/min)</b>	<b>1V (cm<sup>3</sup>/min)</b>	<b>2V (in<sup>3</sup>/min)</b>	<b>2V (cm<sup>3</sup>/min)</b>	
<b>26R-2</b>	6	98	8	131	150 (10.3)
<b>26R-5</b>	6	98	8	131	140 (9.7)
<b>26R-10</b>	8	131	10	164	130 (9.0)
<b>26R-17</b>	8	131	10	164	120 (8.3)
<b>26R-31</b>	10	164	12	197	110 (7.6)
<b>26R-62</b>	10	164	12	197	100 (6.9)
<b>26R-124</b>	12	197	15	246	90 (6.2)

# HOW TO ORDER 26R-2 THRU 26R-124

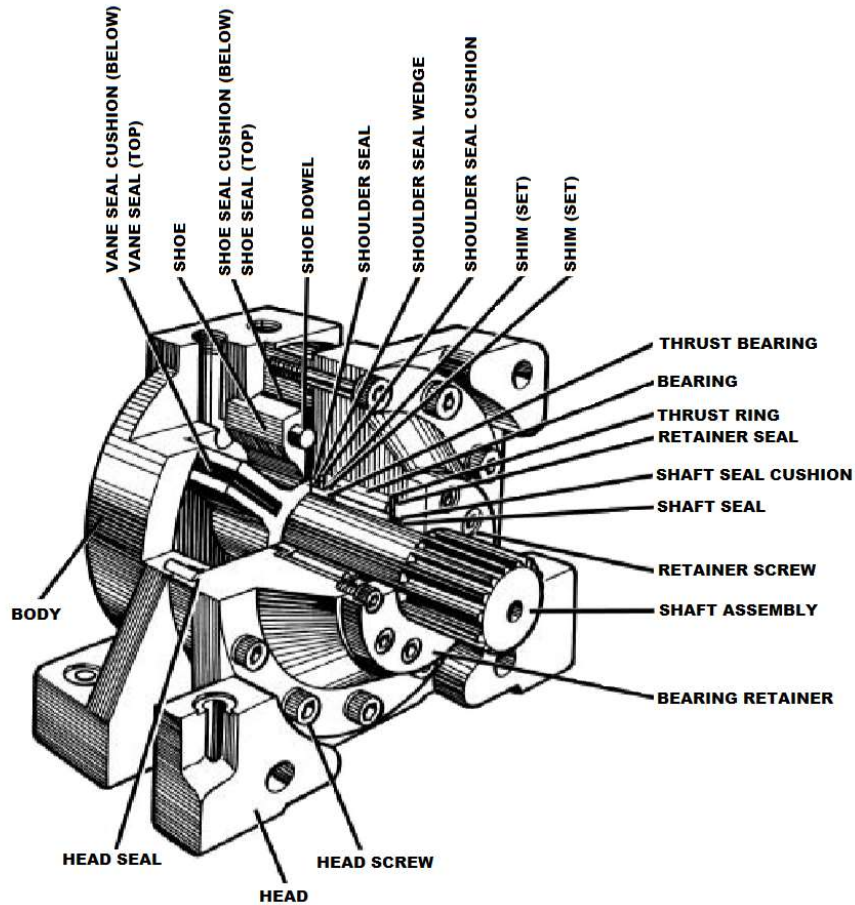

## HOW TO ORDER

Please fill in ALL blocks in accordance with the KEY numbers and letters shown below.

**EXAMPLE:** 26R - 62 - 1V - SE - IS - FT/FLG - 2

-  -  -  -  -  -

**BLOCK #**    1        2        3        4        6        7        8

### Block 1 (MODEL)

26R

### Block 2 (SIZE)

2  
5  
10  
17  
31  
62  
124

### Block 3 (VANES)

1V Single Vane  
2V Double Vane

### Block 4 (SHAFT EXTENSION)

SE Single Extension  
DE Double Extension

### Block 6 (SHAFT TYPE)

IS 30° Involute Spline  
PL Plain  
Z Special

### Block 7 (MOUNTING)

FT/FLG Foot/Flange  
Z Special

### Block 8 (PORTING)

1 NPT  
2 SAE Straight Threads (Standard)  
7 Manifold Ports (Consult factory for information)  
0 BSPP Straight Threads  
Z Special

NOTES: 1. Block "5" isn't used for 26R models

2. All "Z" (non-standard feature request) requires a "Request a Quote" to be filled out for Micromatic to review requirements